

# Corner-Mount Camera *Ultra Rugged Line*


## Vandal-Resistant Indoor Camera with Lockable Cover



*The Corner-Mount Camera features a heavy-gauge stainless steel housing with either a brushed stainless or gray finish.*

**T**he Corner-Mount Camera features a heavy-gauge, stainless steel housing that fits discreetly into corners. A lockable front cover provides vandal resistance. Although it is designed for indoor applications, it is rugged enough to withstand temperatures from 14 to 122 °F (-10 to 50 °C)

The Corner-Mount Camera is provided with easy-to-install, impact-resistant Lexan viewing windows. Clear and tinted window finishes are provided, enabling users to decide whether or not to obscure view of the camera within. Its housing is available with a brushed stainless or gray finish.

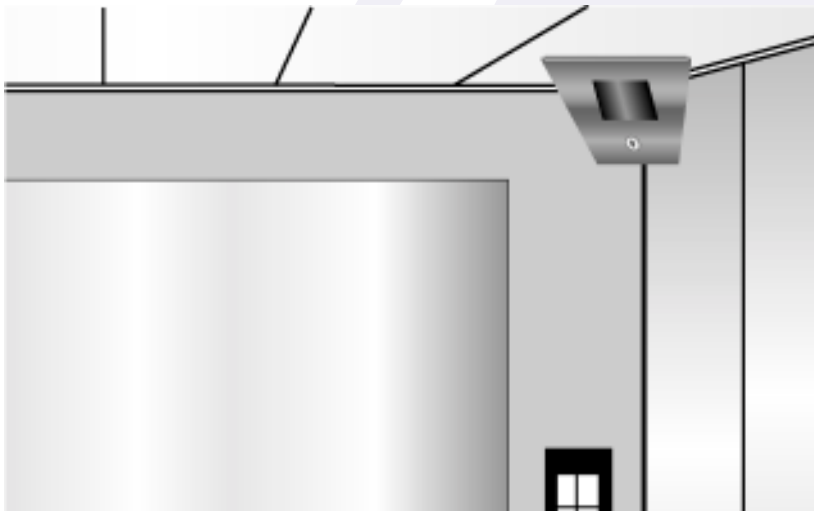

## Features

- Heavy-gauge stainless steel indoor housing fits discreetly into corners
- Lockable cover for vandal resistance
- Brushed stainless or gray finish
- Clear and tinted Lexan® viewing windows
- 580-TVL black-and-white camera or 480-TVL color camera
- Fully adjustable camera position
- Various lens options, including an 8- or 12-mm lens, or a 2.5, 4-, and 6-mm lens pack
- 10- to 40-VDC / 18- to 30-VAC input voltage

The Corner-Mount Camera can be purchased with either a black-and-white camera that delivers 580 TV lines of resolution or a color camera that delivers 480 TV lines of resolution. The black-and-white camera is sensitive to 0.1 lux. The color camera is sensitive to 1 lux. The cameras are fully adjustable.

Various lens options are available, including an 8- or 12-mm lens, or a 2.5, 4-, and 6-mm lens pack.

The Corner-Mount Camera accepts a 10- to 40-VDC / 18- to 30-VAC input voltage.

## Durable Housing

*The Corner-Mount Camera's rugged stainless steel housing and lockable, vandal-resistant cover make it ideal for industrial settings such as freight elevators.*



**GE Interlogix**

**Product  
Specification**

© 2002 GE Interlogix, Kalatel division

## Technical Specifications

### Common Camera Specifications (Black-and-White and Color)

Signal system:	NTSC/EIA standard or PAL/CCIR option
Image sensor:	1/3-in. interline transfer super HAD CCD
Effective picture elements:	811 (H) x 508 (V)
Scanning system:	2:1 interlace—525 lines, 60 fields (NTSC/EIA); optional 625 lines, 50 fields (PAL/CCIR)
Signal-to-noise ratio:	Better than 50 dB (AGC off)
AGC:	Max 30 dB
Backlight compensation:	Automatic histogram on (under AES), center weighted
Synchronization:	Internal / line lock AC
Gamma compensation:	0.45
Video output:	1.0 V pk-pk 75 ohm unbalanced
Electronic shutter:	AES 1/50 (1/60 sec) – 1/100,000 sec
Power supply:	10 – 40 VDC / 18 – 30 VAC, isolated, reverse polarity protected
Operating temperature:	14 to 122 °F (-10 to 50 °C)


### Black-and-White Camera

Resolution:	580 TVL
Sensitivity:	0.1 lux @ f1.2 (minimum illumination); 0.01 lux (faceplate)
Power consumption:	125 mA; 1.5 W @ 12 VDC, 3 W @ 24 VAC

### Color Camera

Resolution:	480 TVL
Sensitivity:	1 lux @ f1.2 (minimum illumination), 0.1 lux (faceplate)
White balance:	Auto white balance 2500 to 9500 K
Power consumption:	160 mA; 1.9 W @ 12 VDC, 3.8 W @ 24 VAC

### Dimensions

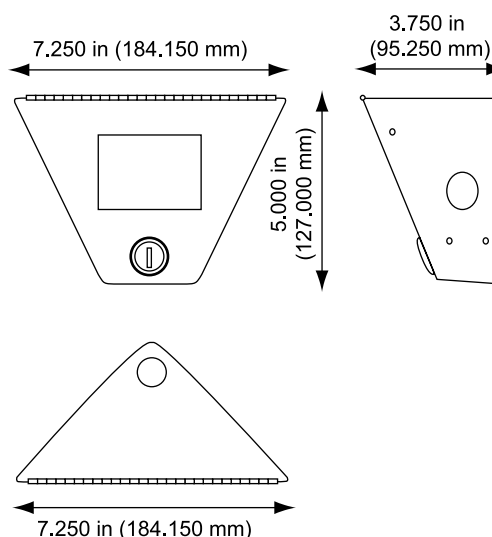

## Ordering Information

Choose your camera type, lens option, and finish to determine the model number of the Corner-Mount Camera that meets your specifications.

C M - <input type="text"/> <input type="text"/> 0 0 - <input type="text"/> <input type="text"/> - <input type="text"/>		
<b>Camera</b>	<b>Lens</b>	<b>Housing Finish</b>
12 B/W	25 Lens pack*	G Gray
15 Color	08 8 mm	S Brushed Stainless
	12 12 mm	

\*4-mm standard. Includes a 2.5 and 6-mm lens.



**GE Interlogix**  
Kalatel

**MAILING ADDRESS**  
Kalatel  
4575 Research Way, STE 250  
Corvallis, OR 97333, USA  
www.kalatel.com

**AMERICAS**  
800-469-1676 (US only)  
tel 541-754-9133  
fax 541-754-7162

**ASIA**  
tel 852-2907-8108  
fax 852-2142-5063

**AUSTRALIA**  
tel 61-3-9259-4700  
fax 61-3-9259-4799

**EUROPE**  
tel 32-2-725-11-20  
fax 32-2-721-86-13