

Telephone Entry/Intercom System

ENTRAGUARD™ Bronze



- Residential/Single Tenant telephone intercom system to control gates
- Uses existing phone line to call from gate to home
- Double ring to distinguish call from gate vs. normal phone call
- 2 relays with individually programmable activation times for separate entrances
- Passcode protected PIN entry for up to 50 users
- Angled, high reliability waterproof (Class IP65 rated) keypad
- Maintenance free, no incandescent bulbs to replace for lighted keypad
- Built in microphone and speaker for hands free operation
- Call waiting to allow visitor communication during telephone conversations
- Call forwarding for instances when no one is home
- Programming can be done from the unit or the house phone

Keri continues the prestigious Entraguard™ telephone entry tradition with the new **Entraguard Bronze**, designed for owners of gated residences who wish to control a gate or exterior building and communicate with visitors from their touch tone telephone. The unit utilizes the residence's existing telephone line to provide voice communication and gate control. Because it is lit by LEDs instead of incandescent bulbs, the Entraguard Bronze is maintenance free. Additionally, the unit has a Class IP65 rated weatherproof keypad.

Arriving visitors simply press the "call" button, which produces a distinctive ring on the resident's phone. The resident can speak with the visitor and grant access by pressing the programmed telephone button. A second button can be programmed to command another gate (often a pedestrian gate) or some other relay-driven function. Calls can be forwarded to another phone so that the gate can be opened remotely when the resident is not at home.



1530 Old Oakland Road, Suite 100
San Jose, CA 95112 USA
(800) 260-5265 • (408) 451-2520 • Fax (408) 441-0309
e-mail: sales@kerisys.com web: www.kerisys.com

DATA SHEET

Entraguard Bronze
Telephone Entry/Intercom System

ENTRAGUARD BRONZE

Integrated Telephone Entry System





General Features

Weather (Class IP65) and Vandal Resistant Keypad
50 User Pass Code PINS
Call Forwarding
Call Waiting
2 Separately Tone-Controlled Relays for 2 Gates
Full Duplex Communication
Marine-Quality Speaker with Superior Sound
Volume Control on Board
Battery Backed Memory
Illuminated Keypad
Maintenance Free
Camera Option Available

Specifications

User Pin Codes: Up to 50
Relay Outputs: Form C (2)
24VAC @ 5A / 115 VAC @ 5A
Ringer Equivalence - 0.1 B
On-Hook Voltage - 40 VDC (+/- 20%)
Ringer Voltage - 200 VAC (+/- 20%), 40 Hz
Operating Temperature: -20°F to 140°F
(-15°C to 60°C)
with heater: -20°F to 140°F
(-29°C to 60°C)
Input Power: 24 VAC @ 1A (center tapped)
Size: 6.28"H x 9.00"W x 4.7"D
(16.0cm x 22.9 x 11.9cm)
Weight: 6.2 lbs. (2.8kg)
Material: 14 gauge steel
Finish: Metallic Powder Coat
Color: Black
Warranty: 1 Year

Specifications subject to change without notice.

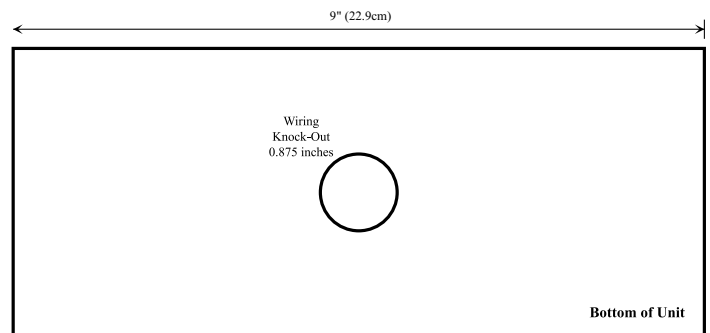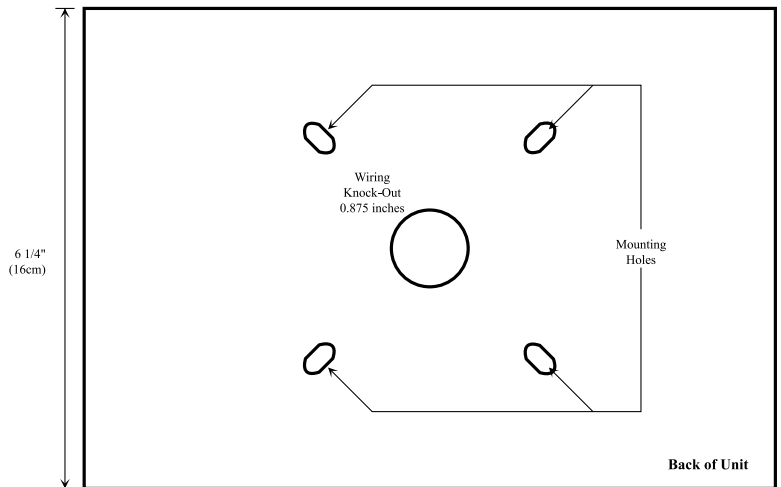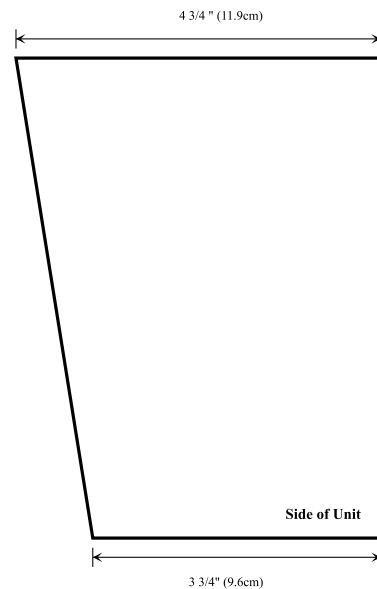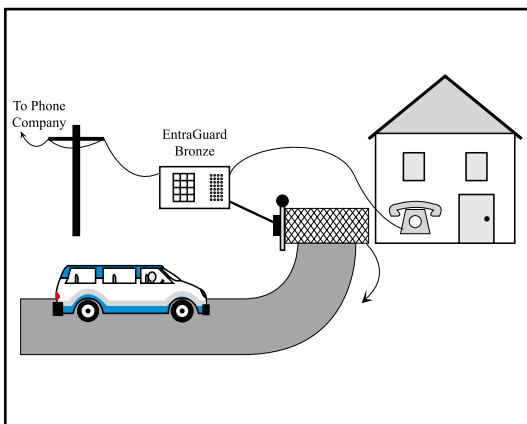

1530 Old Oakland Road, Suite 100
San Jose, CA 95112 USA
(800) 260-5265 • (408) 451-2520 • Fax (408) 441-0309
e-mail: sales@kerisys.com web: www.kerisys.com