

X-1000™ Weatherproof Wall Mount Mini Dome Camera




Specifications:

● X-1000B	
Imager	1/3" .01 lux B&W CCD 420+ TV Lines
Voltage/Current	12 VDC/250ma max
● X-1000C	
Imager	1/3" .02 lux Color CCD 380 TV Lines
Voltage/Current	12 VDC/250ma max
Special Features	(DSP) Switches to B&W Below 1 lux
● X-1000CH	
Imager	1/3" .02 lux Color Hi-Res CCD 480 TV Lines (Sony)
Voltage/Current	12 VDC/250ma max
Special Features	(DSP) Auto White Balance
● X-1000CE	
Imager	1/3" .01 lux Color Hi-Res CCD 480 TV Lines (Day/Night Sony Ex-view)
Voltage/Current	12 VDC/250ma max
Special Features	(DSP) Auto White Balance
Operating Temp:	All Models: -35F to 140F
Standard Lens:	3.6mm wide angle
Lens Options:	2.9, 4.3, 6, 8, 12, 16mm

Features:

- Wall Mount, for Indoor/Outdoor use. Extremely Tough, Weatherproof Construction
- Small, Attractive, Marine Grade Aluminum Housing with 2.5" Dia. High Impact Clear Dome
- High Quality Inner Dome Liner, conceals camera assembly and prevents glare without reducing light sensitivity like tinted domes can
- Tool Free Positioning and Focusing
- Quick Disk Mounting System
- Easy One Handed Dome Installation
- Great Picture Quality from 1/3" B&W, Color, Hi-Res Color and Hi-Res Color Ex-View Grade 1, low lux CCD Imagers
- Optional Category 5 Long Range Twisted Pair Transmitter & Receiver

Made in the U.S.A.

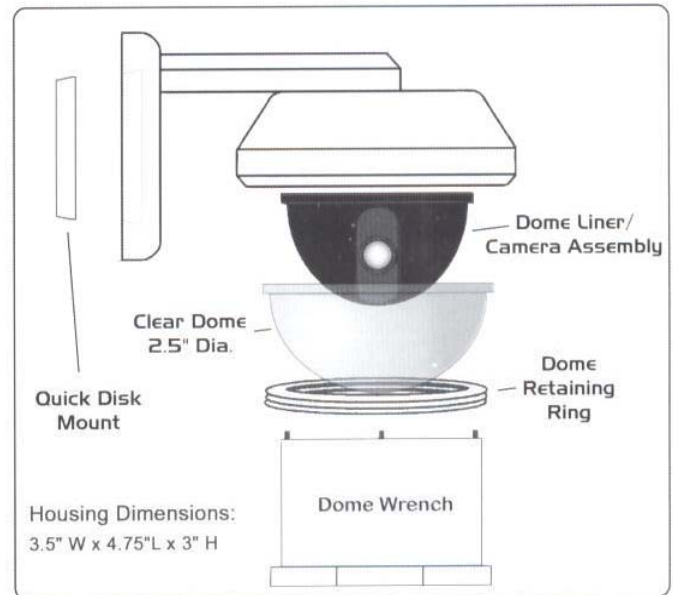

Ordering Information :

X-1000B	B&W
X-1000C	Color
X-1000CH	Hi Res Color
X-1000CE	Hi Res Color EX-View
CAT5E-BNC	Category 5 tx/rx option
Options	Add lens size or CAT5E option to end of model # when ordering



Micro Video Products Inc.

1270 Rankin Drive Ste. B, Troy Michigan 48083 U.S.A.

Phone: 800-442-9002 Fax: 248-589-0886

www.mvpccv.com